


HAV AWWA

- Body construction
Hav AWWA 2"-16"
- Face to face
EN 1558-1 ISO 5752 series 3
- Max working pressure
250 PSI
- Temperature range
-20°C + 140°C according to material
- Operation
Handwheel
T key
Electric actuator
- Coating
Standard: Rilsan (Nylon 11)
Optional: Epoxy/ Enamel (internal)
- Flanges acc. to
ANSI B 16.5, B 16.1 (ASA150)




Materials

Item	Description	Material
1	Body	Ductile Iron
2	Wedge	Ductile Iron+EPDM
3	Stem nut	Bronze
4	Stem	SS
5	Bonnet	Ductile Iron
6,8,9	O-rings, seals	EPDM
7	Gasket	Lead Brass
10	Stem collar	Bronze
11	Gland	Ductile Iron
12	Ring wiper	EPDM
13	Cap	Cast Iron
14	Nut washer	Galvanized Steel
15, 16, 18	Bolts	Galvanized Steel
17	Bonnet gasket	EPDM

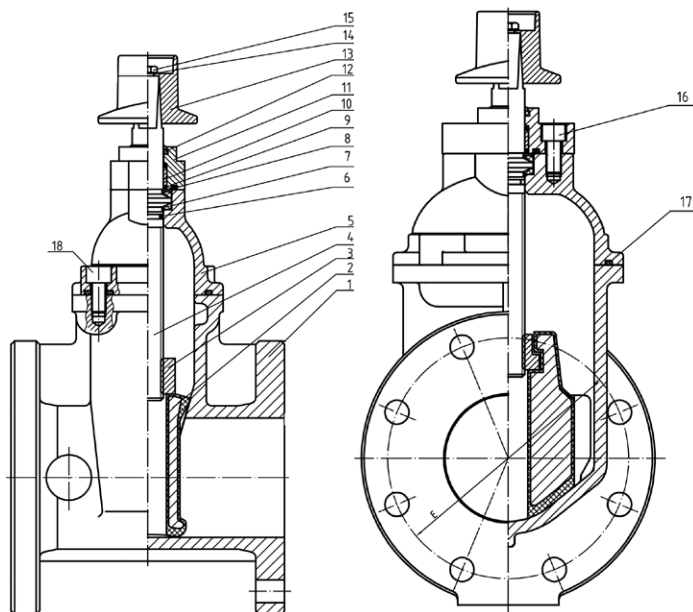

Dimensions

mm	50	65	80	100	150	200	250	300	350	400
inches	2"	2.5"	3"	4"	6"	8"	10"	12"	14"	16"
L (EN 558-1 Series 3)	178	190	203	229	267	292	330	356	381	406
D (ANSI B16.1)	152	178	191	229	279	343	406	483	533	597
H	295	315	345	380	470	550	630	725	815	875
M (optional)	200	200	260	260	375	375	375	400	500	500

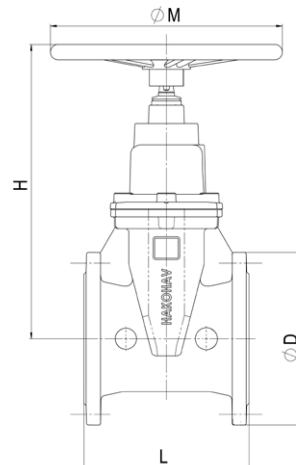

Note: Due to company's policy of continuous improvement, Hakohav Valves reserves the right to change specification without prior notice.