


HAV PN 25

- Body construction Hav 2" - 12"
- Face to face EN 1558-1 series 19 / ISO 5752 series 19
- Max working pressure PN 25
- Temperature range -20°C + 140°C according to material
- Operation Handwheel
T key
Electric actuator
- Coating Standard: Rilsan (Nylon 11)
Optional: Epoxy/ Enamel (internal)
- Flanges acc. to EN 1092-2 (ISO 7005-2)




Materials

Item	Description	Material
1	Body	Ductile Iron
2	Wedge	Ductile Iron+ EPDM
3	Stem nut	Bronze
4	Screw	Carbon Steel
5	Bonnet Gasket	EPDM
6	Stem	SS
7	Bonnet	Ductile Iron
9	Washer	Nylon 1010
9	Bonnet	Ductile Iron
10,11	O- ring	EPDM
12	Gland bushing	Bronze
13	Ring wiper	EPDM
14	Set screw	Steel
15	Cap	Ductile Iron

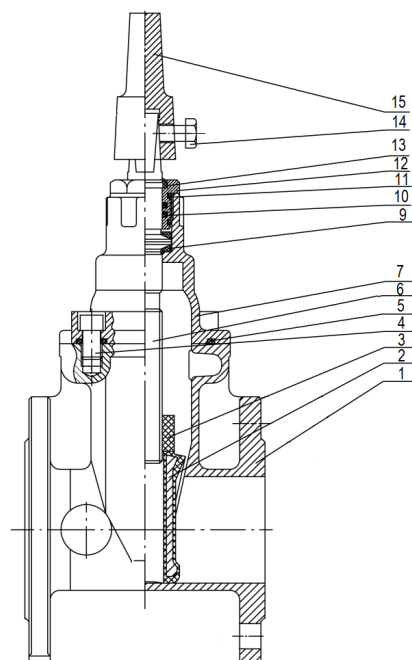

Dimensions

mm	50	65	80	100	150	200	250	300
inches	2"	2.5"	3"	4"	6"	8"	10"	12"
L (ISO 5752)	216	241	283	305	403	419	457	502
D	165	185	200	235	300	360	425	485
H	426	467	514	547	669	801	927	1036
H 1	269	300	336	359	441	546	637	719
M (optional)	200	200	254	254	315	315	406	406

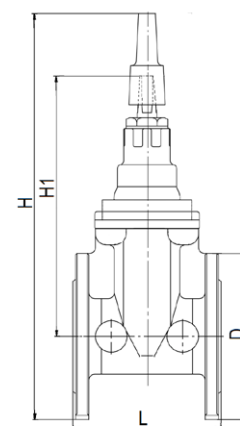

Note: Due to company's policy of continuous improvement, Hakohav Valves reserves the right to change specification without prior notice.