

- Body construction
- Face to face
- Max working pressure
- Temperature range
- Operation
- Coating
- Flanges acc. to

Eko 2"-16"

EN 1558-1 ISO 5752 series 14/15 (DIN 3202 F4/F5)

PN16

-20°C + 140°C according to material

Handwheel

Electric actuator

Standard: Rilsan (Nylon 11)

Optional: Epoxy/ Enamel (internal)


EN1092-2 (ISO 7005-2) PN10/16

ASA 4087 (BS 10 Table D)




Materials

Item No.	Description	Material
1	Body	Ductile Iron
2	Cover	Ductile Iron
3	Wedge	Ductile Iron+EPDM
4	Stem	SS
5	Stem Nut	Brass
6	Stem Guide Bushing	Brass
7	Washer	POM
8	Wiper	AU
9	O- Ring	NBR
10	Bonnet Gasket	EPDM
11	Bolts	SS

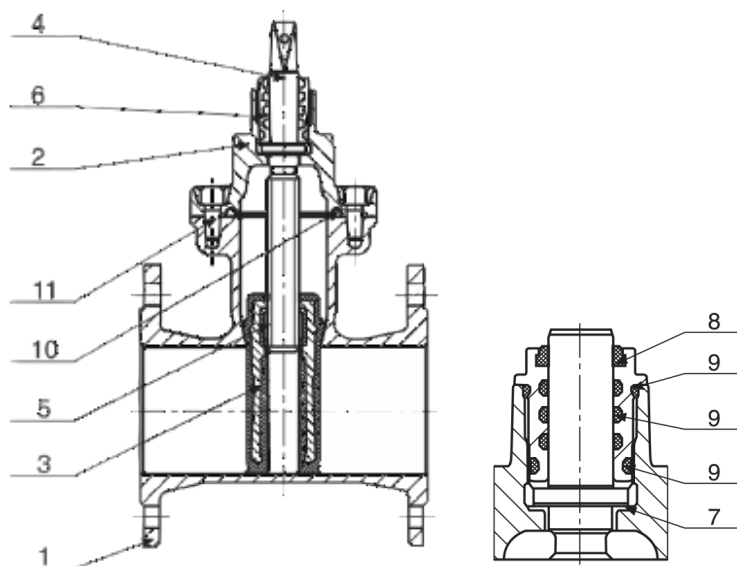

Dimensions

mm	50	80	100	150	200	250	300	350	400
inches	2"	3"	4"	6"	8"	10"	12"	14"	16"
L(F4)	150	180	190	210	230	250	270	290	310
L(F5)	250	280	300	350	400	450	500	550	600
D (EN 1092-2 PN 10)	165	200	220	285	340	395	445	505	565
D (EN 1092-2 PN 16)	165	200	220	285	340	405	460	520	580
D (ASA4087 (BS 10 Table D))	150	185	215	280	335	405	455	525	580
H	233	278	310	386	493	606	670	852	936
M (optional)	200	250	315	315	400	500	500	500	630

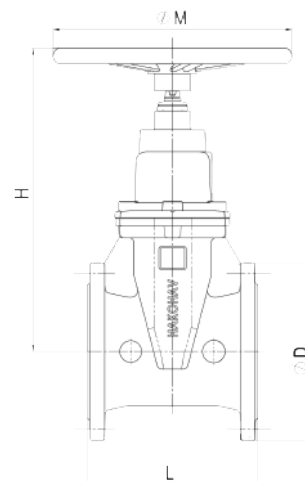

Note: Due to company's policy of continuous improvement, Hakohav Valves reserves the right to change specification without prior notice.