



- Body construction Zeta 2"-24"
- Face to face EN 558-1/ ISO 5752 series 20
- Max working pressure PN 10
- Temperature range Up to + 70°C
- Operation Handwheel
- Coating Epoxy powder
- Flanges acc. to EN 1092-2 (ISO 7005-2) PN 10

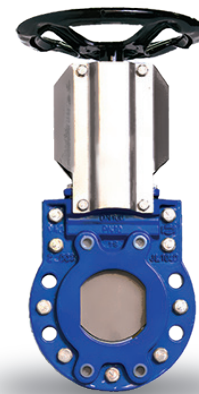


Materials

Item	Description	Material
1	Body	Cast Iron GG25
2	Thrust Piece	Cast Iron GG25
3	Knife	SS 304/SS 316
4	Stem	SS 304/SS 316
5	Bearing Plate	Cast Iron GG 25
6	Stem Nut	Brass
7	Protection Panels	SS
8	Scraper Profile	CZ 120
9	U Profiled Gasket	NBR
10	Lateral Seal Guiding	NBR
11	Rod	PTFE
12	Handwheel	Steel
13	Guiding Disc	ALSn2Cul
14	Thrust Profile	NBR
15-24	Bolts Nuts & Washer	SS

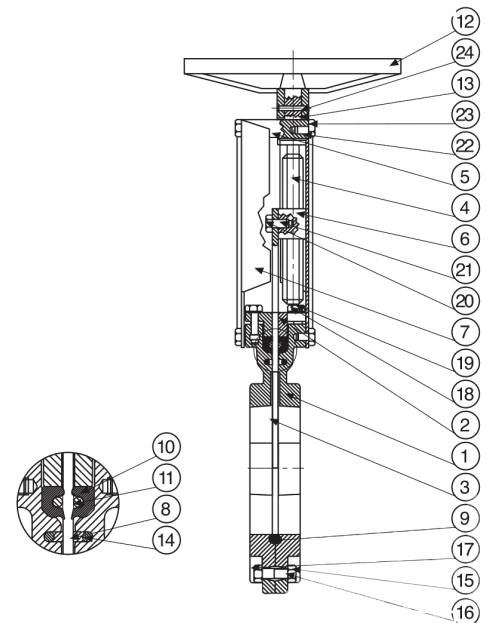

Dimensions

mm		50	65	80	100	125	150	200	250	300	350	400	500	600
inches		2"	2.5"	3"	4"	5"	6"	8"	10"	12"	14"	16"	20"	24"
General	A	290	305	340	365	420	480	580	740	830	930	1030	1250	1430
	B	83	93	100	110	125	143	170	198	223	253	283	335	390
	C	165	185	200	220	250	285	340	395	445	505	565	670	780
	Dk	200	200	200	200	200	250	300	400	400	400	400	500	500
	E	15	15	17	18	18	21	22	28	29	29	33	40	40
	L	43	46	46	52	56	56	60	68	78	78	102	127	154
	K	125	145	160	180	210	240	295	350	400	460	515	620	725
Flange Bore Hole	No.	4	4	8	8	8	8	8	12	12	16	16	20	20
	Thread	M16	M16	M16	M16	M16	M20	M20	M20	M20	M20	M24	M24	M27
Valve Bore Hole	No. per side	4	4	4	4	4	4	4	8	8	10	10	14	14
	d2	M16	M16	M16	M16	M16	M20	M20	M20	M20	M20	M24	M24	M27
	Thread depth	10	12	12	14	15	15	15	17	22		26	26	26
	No.			4	4	4	4	4	4	4	6	6	6	6
	d3			19	19	19	23	23	23	23	23	26	26	30
Flange EN 5210		F10	F10	F10	F10	F10	F10	F10	F10	F10	F10	F10	F10	F10
Turn/ Stroke		13	17	20	25	32	30	40	50	60	70	67	84	100
Weight		9	11	12	15	20	25	37	69	91	134	164	280	370

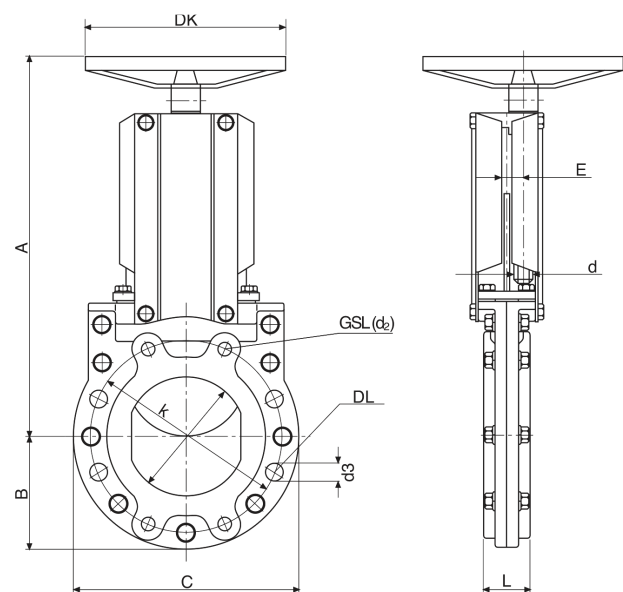

Note: Due to company's policy of continuous improvement, Hakohav Valves reserves the right to change specification without prior notice.